

# Digital Crane Scale

## CS-SL



### Features:


- ◆ **Enclosure:**
  - Cast aluminum housing for maximum protection.
- ◆ **Multi-weighing units:**
  - kg, N & lb. (kg are default unit).
- ◆ **Multi-function operation:**
  - Tare
  - Zero
  - Auto zero tracking
  - Total
  - Hold
  - Overload warning and record
  - Operated through infrared remote controller.

- ◆ **User-friendly design:**

- Large red 5 digit LED display (digit height 30mm)
- Battery Operated with low battery indication
- Automatic turn off
- Power-saving function.

- ◆ **Optional features:**

- RS-232-continuous output.
- Wireless Remote display 3" or 5" digit high

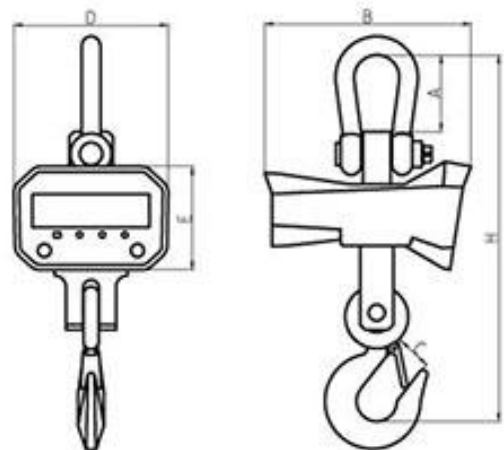

### Dimensions and Specifications:

MODEL	Cap. (kg)	Min.Weigh (kg)	Div.min. (kg)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	H (mm)	N.W (kg)
<b>CS-SL-2t</b>	2,000	20	1	95	260	33	195	135	430	10.5
<b>CS-SL-3t</b>	3,000	20	1	95	260	40	195	135	455	11.5
<b>CS-SL-5t</b>	5,000	40	2	120	325	50	240	165	535	17.5
<b>CS-SL-10t</b>	10,000	100	5	124	325	60	240	165	660	27.5
<b>CS-SL-15t</b>	15,000	200	5	225	345	70	240	165	855	49
<b>CS-SL-20t</b>	20,000	200	10	225	345	85	240	165	920	56

### Main technical data:

Accuracy Standard	According to OIML class III
Display	30mm (1.2") 5digits LED
Units	Kilograms, Newtons or Pounds
Resolution	2000 to 3000 divisions standard (up to 15,000 available)
Zero Range	4% F.S.
Tare Range	20% F.S.
Overload Indication	100% F.S. + 9e
Max. Safety Load	125% F.S.
Ultimate Load	400% F.S.
Battery Type	Fully sealed Lead-Acid battery, 6V/4.5Ah
Battery Life	≥50 hours
Adapter	DC 9V/1000mA
Operating Humidity	≤85% RH under 20°C
Remote Controller Distance	Max. 15m
Battery of Remote Controller	2pcs AAA size battery
Operating Temp.	-10 to +40 Celsius